


POWER AND PLUMBING CONNECTIONS

Integrated System (Shared Solar Provisions)

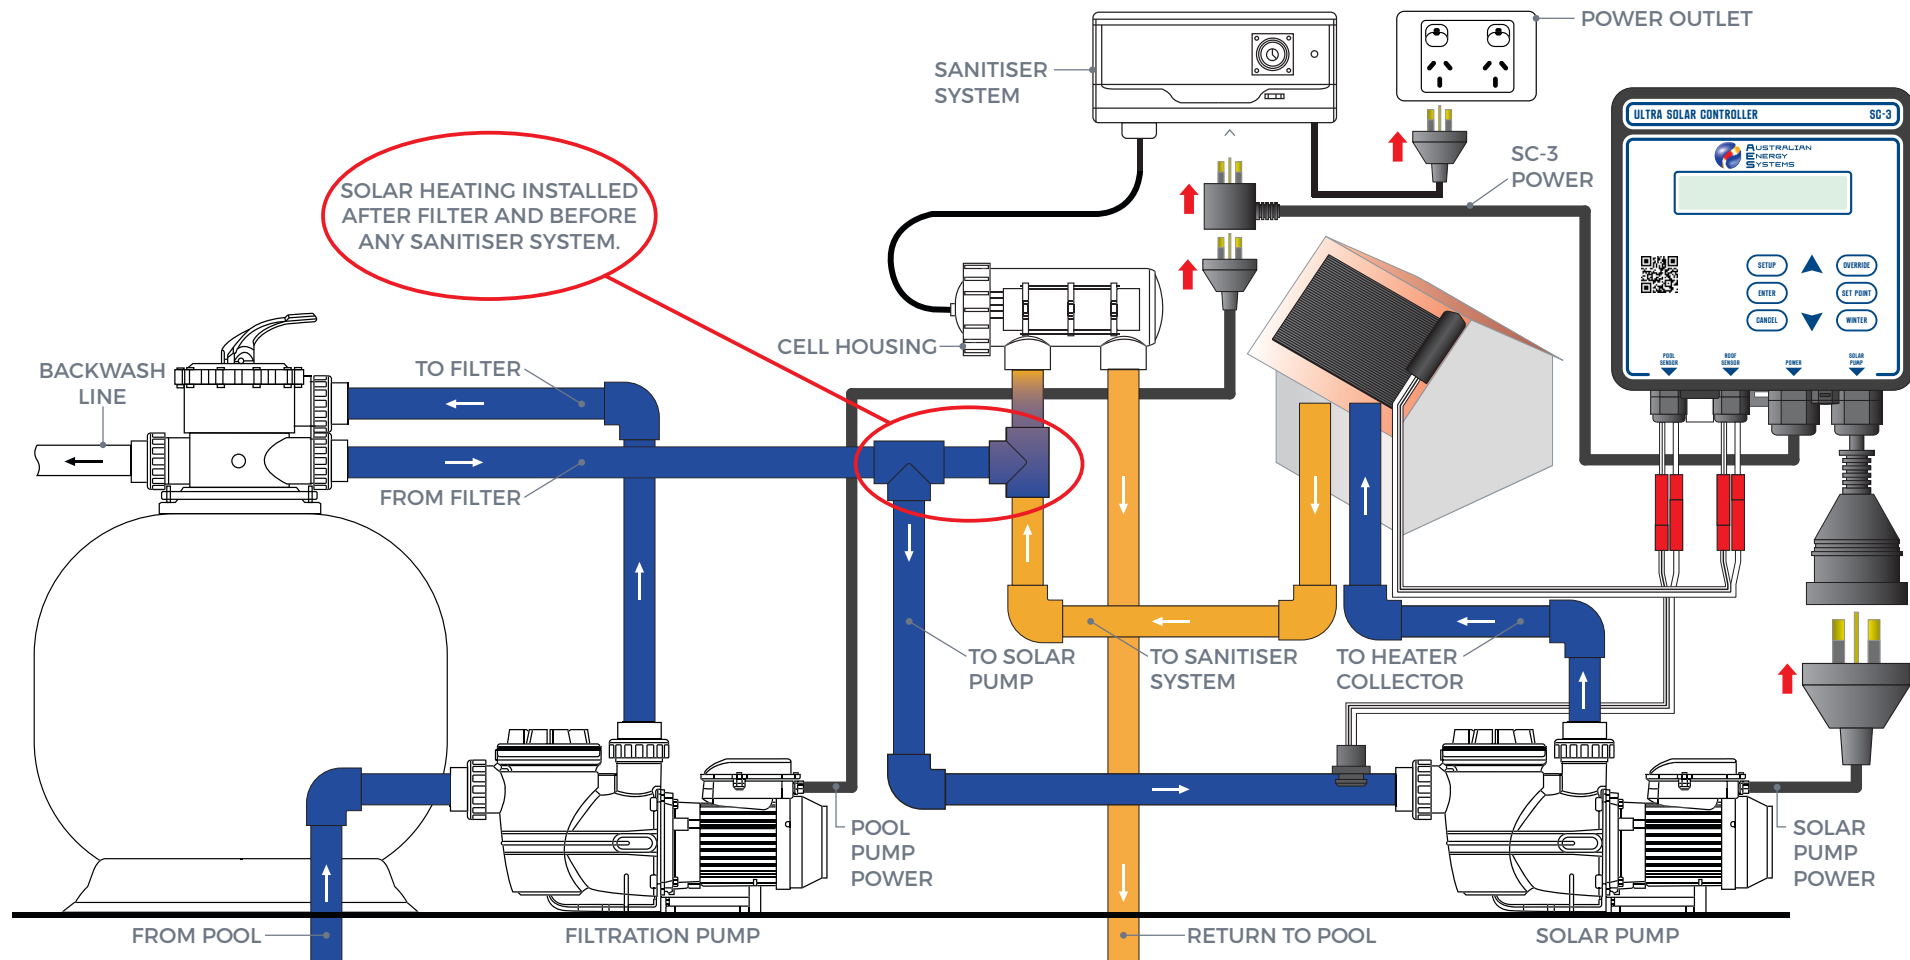

POWER CONNECTIONS

- Connect the Sanitiser System power lead to a suitable 10 Amp rated, weather resistant power outlet.
- Connect the **SC-3** power lead to the Sanitiser System pool pump outlet.
- Connect the Pool Pump power lead into the piggy-back socket of the **SC-3** power lead.
- Connect the Solar Pump to the **SOLAR PUMP** outlet of the **SC-3**.

PLUMBING CONNECTIONS

- Plumb the suction line of the Solar Pump into the pool return line after the filter, and before the heated water return from the Heater Collector.
- Plumb the heated water line into the pool return line after the solar pump take-off and before the Sanitation System.
- The water flow for the Solar Heating must always be before any type of Sanitation System to prevent damage to the Heater Collectors from high sanitiser levels.